

1-Line, Bi-directional, Transient Voltage Suppressors

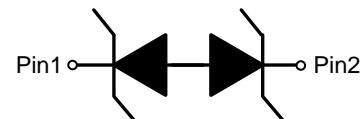
Descriptions

The ESD5D200TA is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD5D200TA is available in SOD-882 package. Standard products are Pb-free and Halogen-free.



SOD882



Circuit diagram

Features

- Stand-off voltage: $\pm 5V$ Max
- Transient protection for each line according to IEC61000-4-2 (ESD): $\pm 30KV$ Air, $\pm 30 KV$ contact
IEC61000-4-5 (Surge): 18A (8/20 μ s)
- Solid-state silicon technology
- Low leakage current

Order information

| Device | Marking | Package | Shipping |
|------------|---------|---------|-----------------|
| ESD5D200TA | H | SOD-882 | 10000/Tape&Reel |

Applications

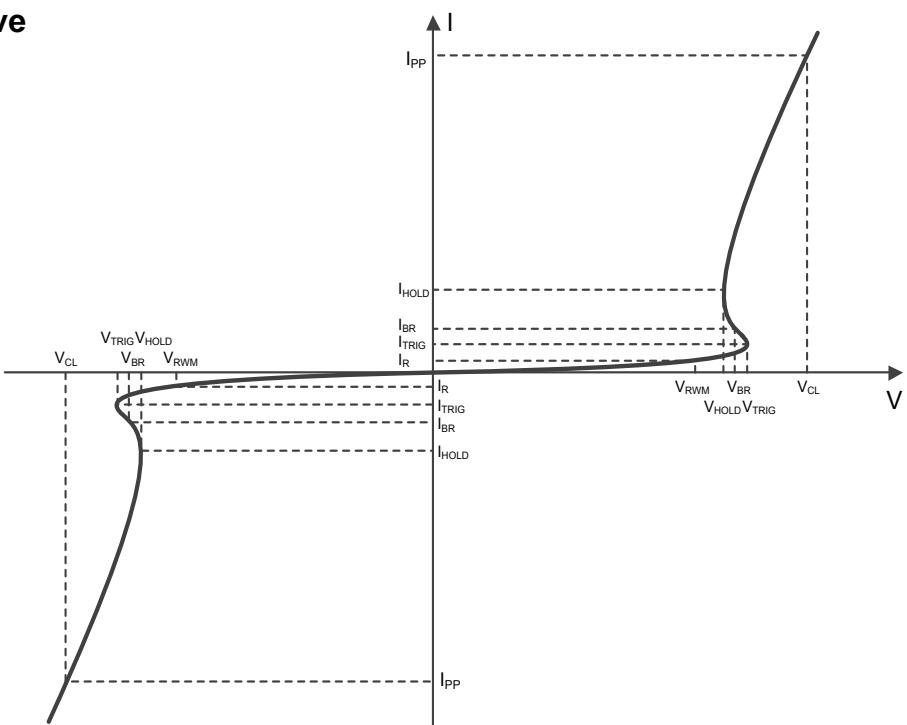
- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- CAR/MID DVD/MP3/MP4/PMP Players

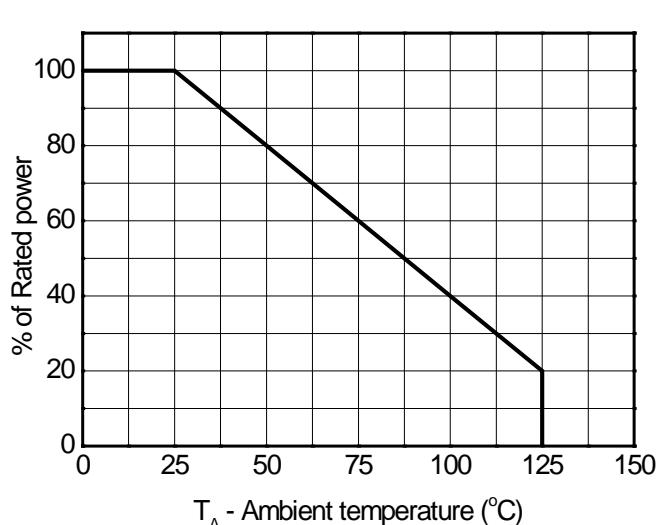
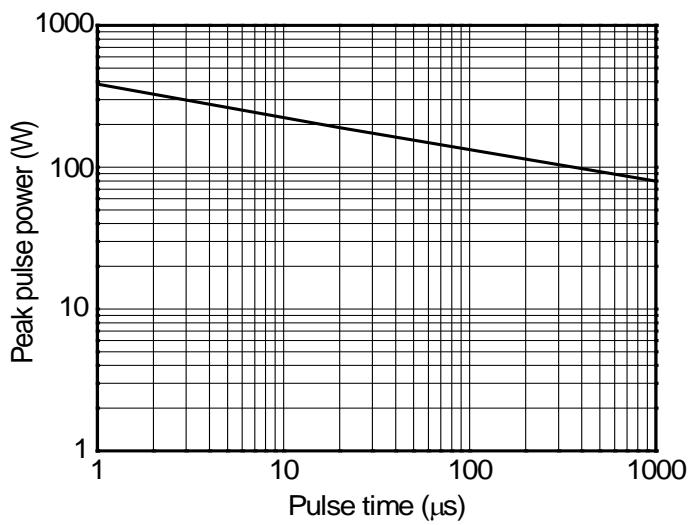
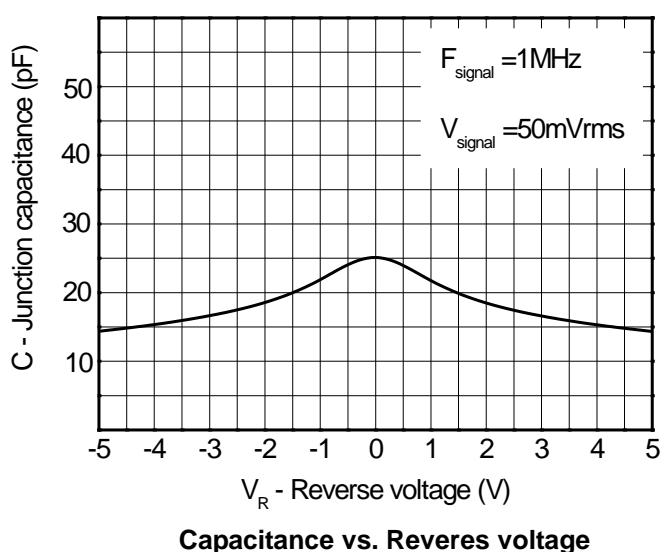
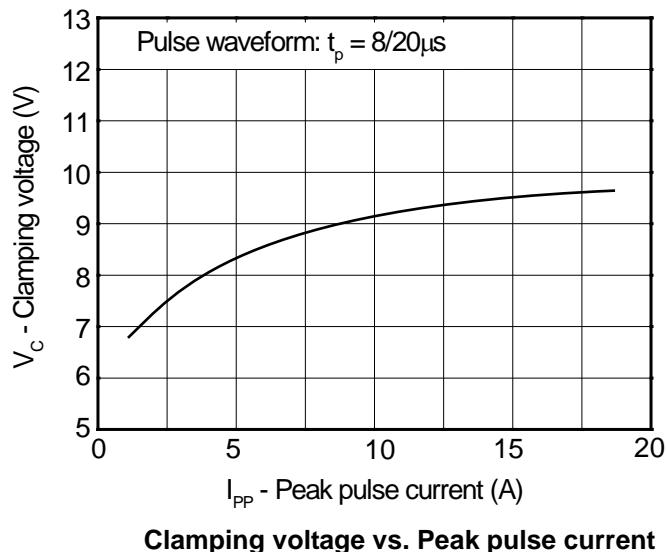
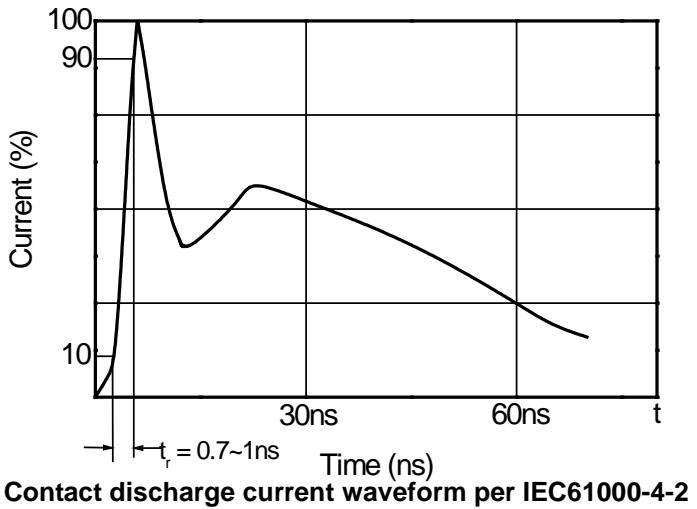
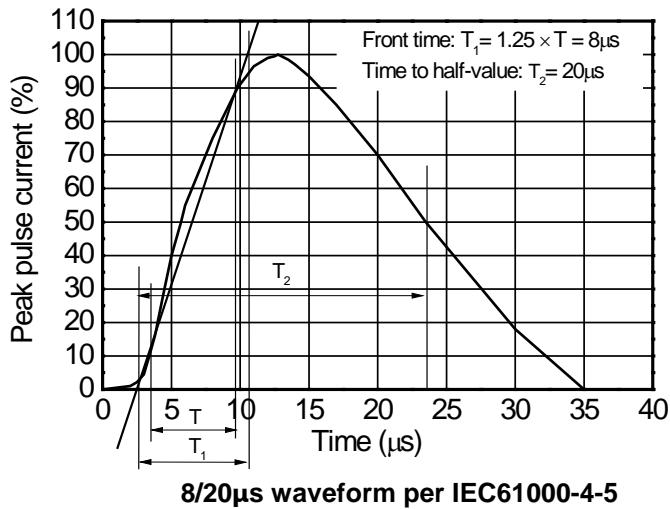
Absolute maximum ratings

| Parameter | Symbol | Rating | Unit |
|---|-----------|----------|------|
| Peak pulse current ($t_p = 8/20\mu s$) | I_{PP} | 18 | A |
| ESD according to IEC61000-4-2 air discharge | V_{ESD} | ± 30 | kV |
| ESD according to IEC61000-4-2 contact discharge | | ± 30 | |
| Operating temperature | T_{OP} | -40~85 | °C |
| Operation junction temperature | T_J | 125 | °C |
| Lead temperature | T_L | 260 | °C |
| Storage temperature | T_{STG} | -55~150 | °C |

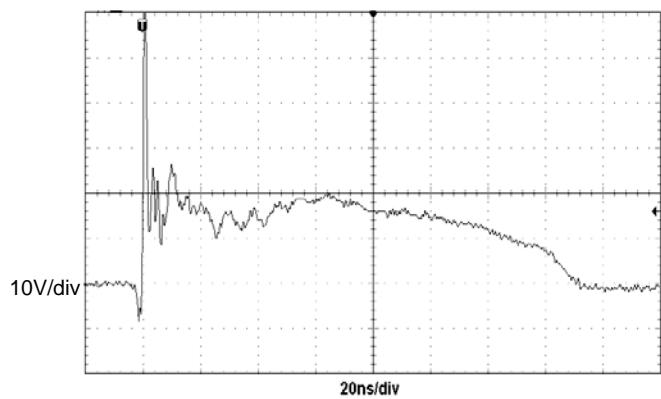
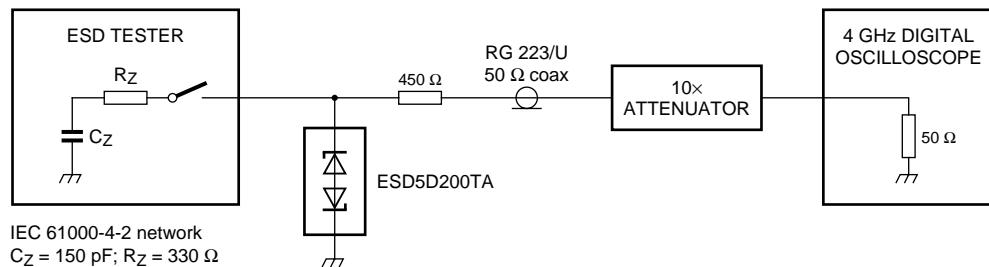
Electrical characteristics (TA=25 °C ,unless otherwise noted)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---------------------------|-----------|-----------------------------------|------|------|---------|------|
| Reverse stand-off voltage | V_{RWM} | | | | ± 5 | V |
| Reverse leakage current | I_R | $V_{RWM} = 5V$ | | | 0.5 | uA |
| Reveres breakdown voltage | V_{BR} | $I_T=1mA$ | 6.0 | | | V |
| Clamping voltage | V_C | $I_{PP}=1A \text{ tp}=8/20\mu s$ | | 8.0 | 9.0 | V |
| | | $I_{PP}=18A \text{ tp}=8/20\mu s$ | | 8.5 | 9.5 | V |
| Junction capacitance | C_J | $V_R = 0V, f = 1MHz$ | | 25 | 30 | pF |

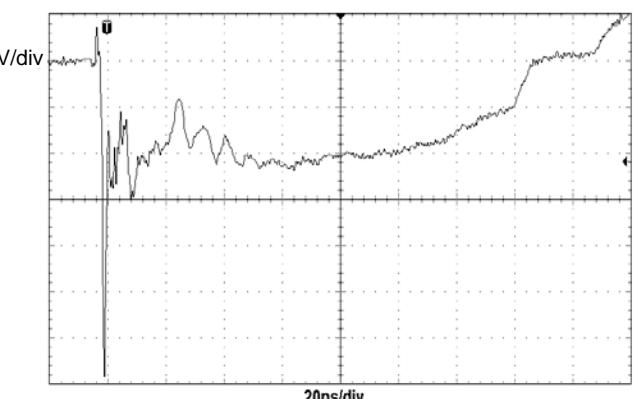
Electrical performance curve V_{RWM} Reverse stand-off voltage I_R Reverse leakage current V_{CL} Clamping voltage I_{PP} Peak pulse current V_{TRIG} Reverse trigger voltage I_{TRIG} Reverse trigger current V_{BR} Reverse breakdown voltage I_{BR} Reverse breakdown current V_{HOLD} Reverse holding voltage I_{HOLD} Reverse holding current

Typical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

ESD clamping test setup and waveforms



ESD clamping
(+8kV contact discharge per IEC61000-4-2)

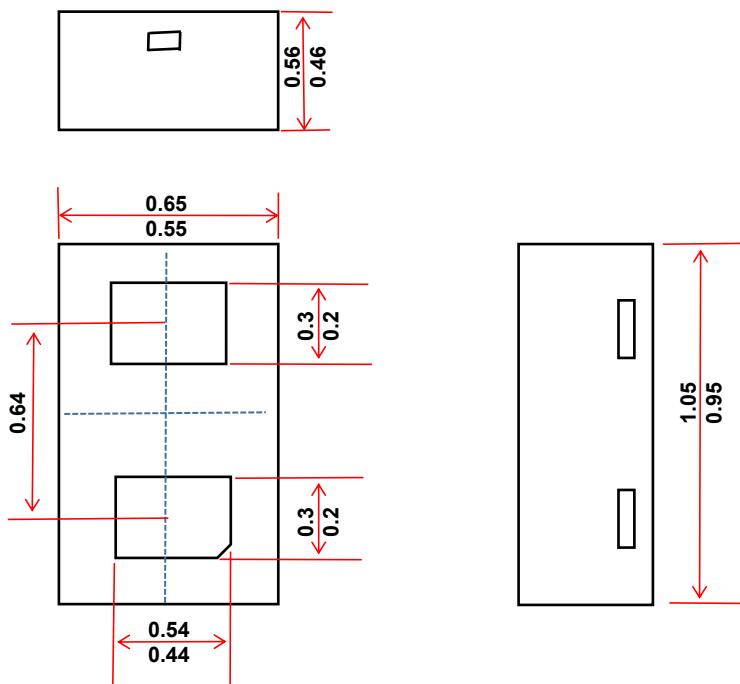


ESD clamping
(-8kV contact discharge per IEC61000-4-2)

Package outline dimensions**SOD882**

DIMENSION OUTLINE:

Unit:mm

**Recommended Mounting Pad Layout** Unit:mm