

1-Line, Bi-directional, Transient Voltage Suppressors


Descriptions

The ESD5D350TA is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD5D350TA is available in DFN1006-2L package. Standard products are Pb-free and Halogen-free.



DFN1006-2L

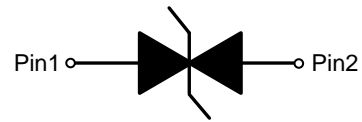

Circuit diagram

Features

- Stand-off voltage: $\pm 5V$ Max
- Transient protection for each line according to IEC61000-4-2 (ESD): $\pm 30KV$ Air, $\pm 30KV$ contact
IEC61000-4-4(EFT): 40 A (5/50 ns)
IEC61000-4-5 (Surge): 18A (8/20 μ s)
- Solid-state silicon technology
- Low leakage current

Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- CAR/MID DVD/MP3/MP4/PMP Players

Order information

Device	Marking	Package	Shipping
ESD5D350TA	F1	DFN1006-2L	10000/Tape&Reel

Absolute maximum ratings


Parameter	Symbol	Rating	Unit
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	18.0	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	
Operation junction temperature	T_J	-50~125	$^{\circ}C$
Lead temperature	T_L	260	$^{\circ}C$
Storage temperature	T_{STG}	-65~150	$^{\circ}C$

Electrical characteristics (TA=25 $^{\circ}C$, unless otherwise noted)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				± 5	V
Reverse leakage current	I_R	$V_{RWM} = 5V$			0.2	μA
Reverse breakdown voltage	V_{BR}	$I_T = 1mA$	5.5		8.0	V
Clamping voltage	V_C	$I_{pp} = 1A$ $t_p = 8/20\mu s$		8.5	9.0	V
		$I_{pp} = 18A$ $t_p = 8/20\mu s$		10.0	12.0	V
Junction capacitance	C_J	$V_R = 0V$, $f = 1MHz$		35.0	40.0	pF

Electrical performance curve


- V_{RWM} Reverse stand-off voltage
- I_R Reverse leakage current
- V_{CL} Clamping voltage
- I_{PP} Peak pulse current
- V_{TRIG} Reverse trigger voltage
- I_{TRIG} Reverse trigger current
- V_{BR} Reverse breakdown voltage
- I_{BR} Reverse breakdown current
- V_{HOLD} Reverse holding voltage
- I_{HOLD} Reverse holding current

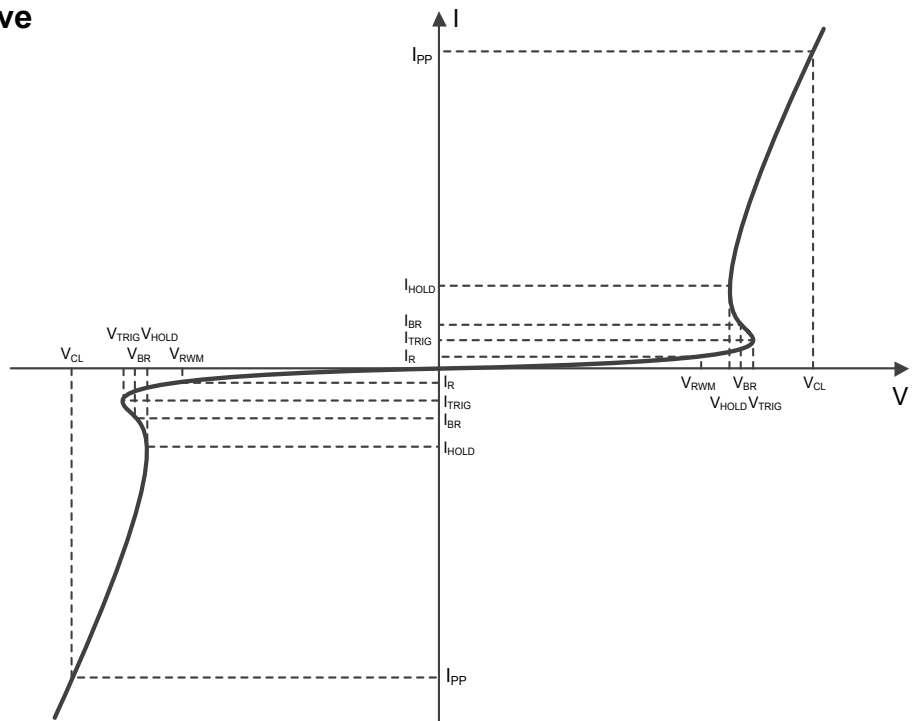


Typical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

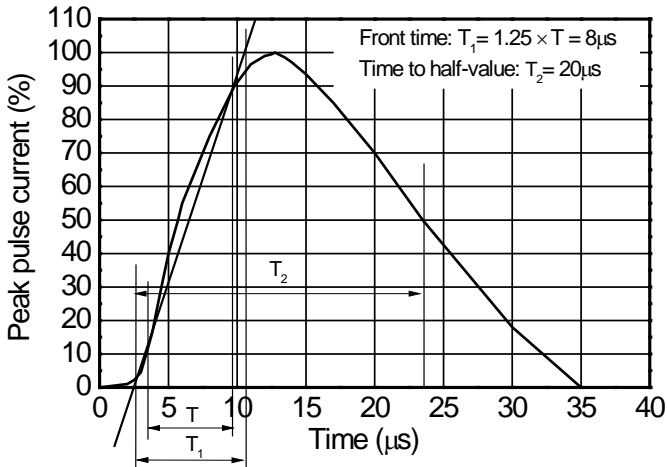


8/20 μs waveform per IEC61000-4-5

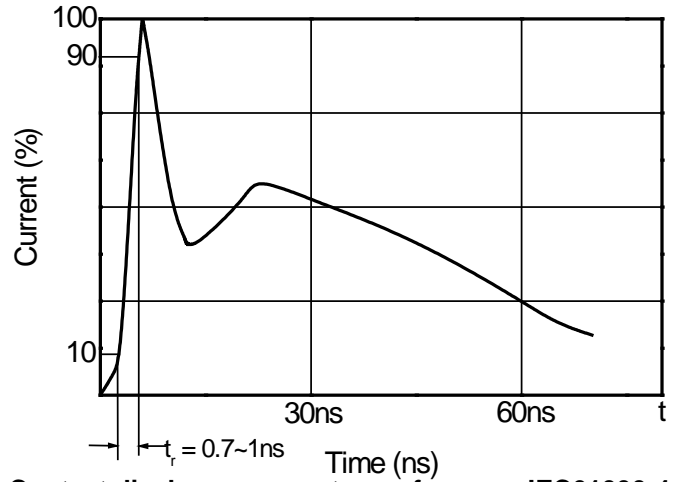


Contact discharge current waveform per IEC61000-4-2

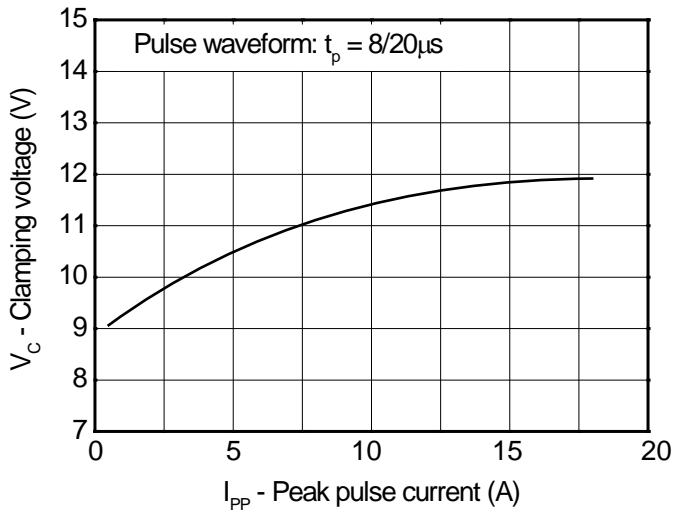


Clamping voltage vs. Peak pulse current

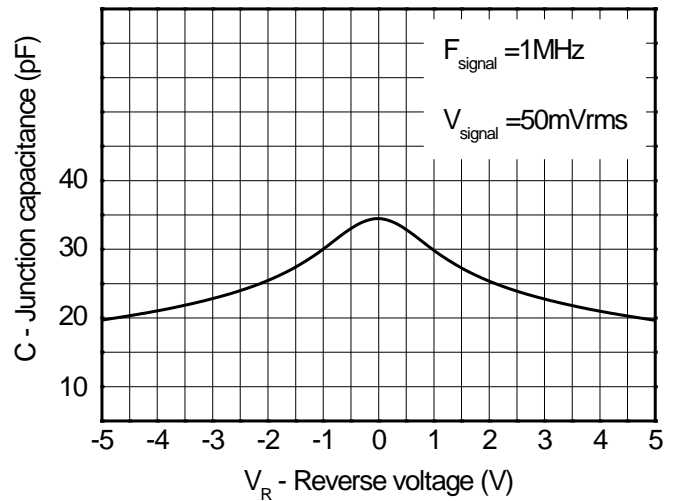

Capacitance vs. Reverses voltage

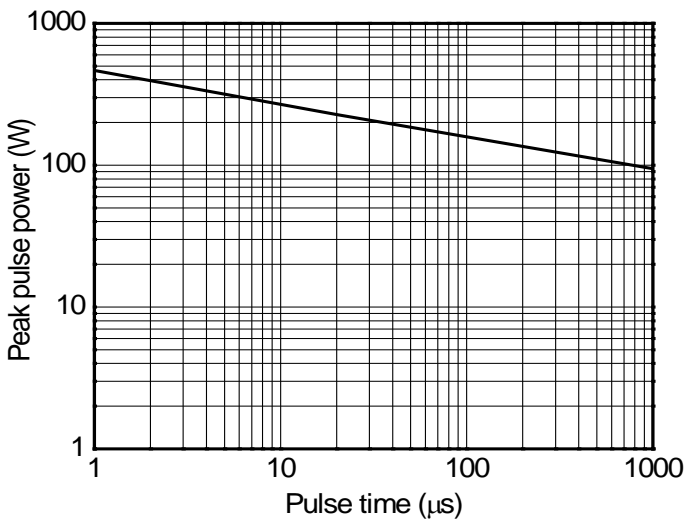

Non-repetitive peak pulse power vs. Pulse time

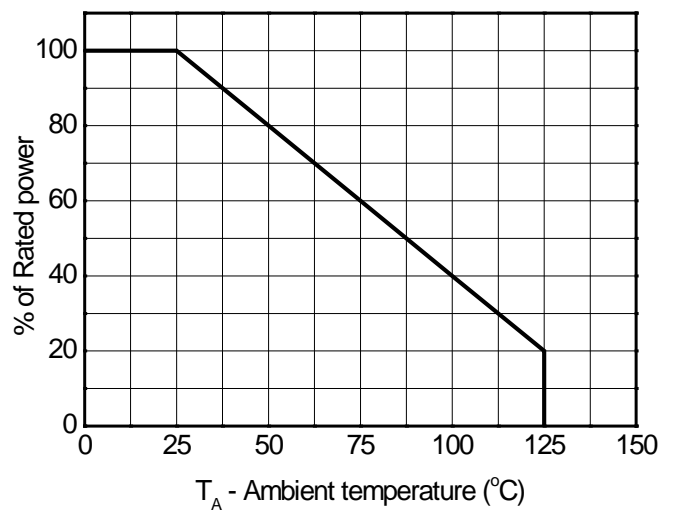


Power derating vs. Ambient temperature

Package outline dimensions

SOD882

DIMENSION OUTLINE:

Unit:mm

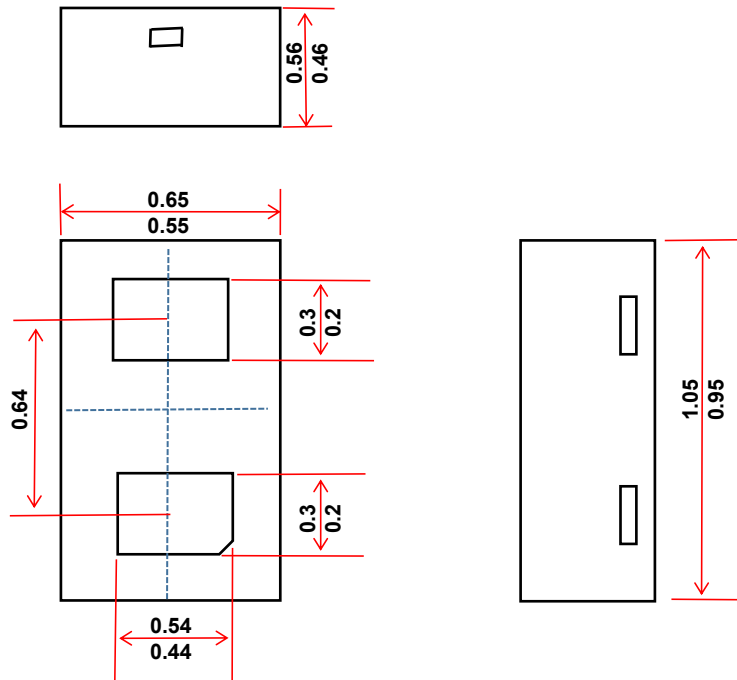

Recommended Mounting Pad Layout Unit:mm

